

## ■ 前言

### 尊敬的用户：

感谢您选购得胜XW5有源超低音箱，该音箱是炫武K歌套装所用到的超低音箱，音箱小巧美观，音质方面，浑厚有力，层次清晰。使用前请您仔细阅读说明书，以便能正确的操作使用。


若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线 400 6828 333 或微信扫描二维码关注得胜官方公众号与我们联系。



## ■ 产品特性

- 单元采用了一只10寸橡胶边低音扬声器，低频丰满、厚实、有力。
- 箱体采用倒相式结构，精确的声学仿真设计确保较高的低频效率。
- 炫武K歌系统搭配XW5有源超低音箱，使组成2.1立体声扩声系统，提升整个声场的沉浸感、空间感知和情感共鸣。

## ■ 功能示意

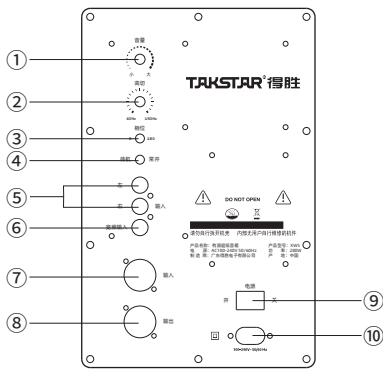

- ① 音量调节旋钮：顺时针加大音量，逆时针旋转减小音量。
- ② 高切旋钮：顺时针增加音箱输出频宽范围，逆时针减小音箱输出频宽范围。
- ③ 相位拨动开关：开关拨动到“0”位置，此时音箱正相输出，开关拨动到“180”位置，音箱反向180°输出，出厂默认“0”位置。
- ④ 待机常开拨动开关：开关拨动到“待机”位置，当30分钟没信号输入，音箱正面LED灯变红，音箱进入待机状态达到节能目的，当有信号进入时，音箱自动进入工作状态；开关拨动到“常开”位置，音箱将一直处于工作状态。
- ⑤ 音频输入接口：该输入为一组RCA莲花输入接口，从该接口输入的音频信号受“高切旋钮”控制，炫武K歌套装的超低音频信号将从该口输入。
- ⑥ 宽频输入接口：从该口输入的信号不受“高切旋钮”控制，音箱输出频率范围为：30Hz-300Hz。
- ⑦ 音频输入口：该接口为卡侬输入接口，从该接口输入的信号将受“高切旋钮”控制。
- ⑧ 音频输出口：该接口为卡侬输出接口，信号可以从该接口输出为其他超低音箱提供信号。
- ⑨ 电源开关：打开或关闭音箱电源。
- ⑩ 电源输入口：从该接口接入市电为音箱供电。

## ■ 标准配置

- 音箱 x 1
- 电源线 x 1
- 说明书 x 1

## ■ 适用场合

搭配炫武K歌套装应用于家庭K歌，小型舞台等

## ■ 技术参数

- 功率：280W
- 输出阻抗：4Ω
- 扬声器单元尺寸：10寸
- 频率响应(±3dB)：30Hz-300Hz
- 电源：AC:100-240V 50/60Hz
- 箱壳：18mm中纤板
- 产品尺寸(W\*D\*H)：343\*343\*394mm
- 净重：10.2kg

注：以上数据由得胜实验室测试得到，并拥有最终解释权！

## ■ 安全警示

为避免电击、高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品前，请仔细阅读并遵守以下事项：

1. 使用产品时请确认所连接设备与本产品功率是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常和听力损伤；
2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送经销商检修；
3. 本产品及配件都应放置在室内干燥通风处，勿长期存放在潮湿、灰尘多的环境，使用中避免靠近火源、雨淋、进水、过度碰撞、抛掷、振动本机及覆盖通风孔，以免损坏其功能；
4. 若产品需要固定于墙壁或天花板上时，请确保固定到位，防止因固定强度不足导致产品发生跌落危险；
5. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本机，以免导致意外事故；
6. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地经销商跟进处理。

## 产品服务保证书

### 注意事项：

1. 本单为保修凭证，请用户妥善保管，如有遗失，恕不保修或退换。
2. 保修期限：购买之日起十二个月内。
3. 除了不可抗力事件损坏外，由本公司负责，免费维修。
4. 如属保管不善或使用不当造成的损坏，维修点将酌情收费。
5. 擅自拆卸维修者，不予保修。
6. 以上保修条款仅限于中国市场适用（不包含港澳台地区）。

姓名：\_\_\_\_\_ 电话：\_\_\_\_\_ 地址：\_\_\_\_\_

商品：\_\_\_\_\_ 型号：\_\_\_\_\_ 购买日期：\_\_\_\_\_ 年 \_\_\_\_\_ 月 \_\_\_\_\_ 日

维修记录栏 (由维修员填写)	维修员签名	日期

◆ 广东得胜电子有限公司 ◆ 电话：400-6828-333 ◆ 地址：广东省惠州市博罗县龙溪街道富康一路2号



## ■ Preface

Dear Customer,


Thank you for choosing the Takstar XW5 Active Subwoofer. This subwoofer is designed for use with the XW Series Karaoke Set. It features a compact and stylish design, delivering rich, powerful sound with clear layering. Read this manual thoroughly for proper use.

If you have any questions or suggestions, please contact our local sales service.

## ■ Features

- Equipped with a 10-inch rubber surround woofer for rich, deep, and powerful bass.
- Bass reflex design, with precise acoustic simulation ensuring high bass efficiency.
- Pairs with the XW Series Karaoke Set to form a 2.1 stereo sound system, enhancing the overall immersion, spatial awareness, and emotional resonance of the audio experience.

## ■ Function Overview

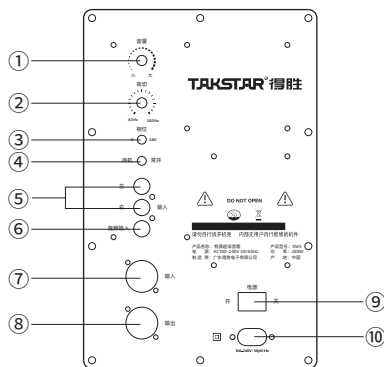

- ① Volume Control Knob: Turn clockwise to increase volume, and vice versa.
- ② HPF (High Pass Filter) Knob: Turn clockwise to increase the output frequency range, and vice versa.
- ③ Phase Switch: Set to 0 for in-phase output; set to 180 for 180° out-of-phase output. Default position is 0.
- ④ Standby/Always-On Switch: Set to “Standby” (left) to enter standby mode after 30 minutes of no signal input, indicated by a red LED light. The subwoofer will automatically resume operation when a signal is detected. Set to “Always On” (right) to keep the subwoofer in operation continuously.
- ⑤ Audio Input Interface: A set of RCA input interface, subject to HPF Knob control. Subwoofer signals from the XW Series Karaoke Set connect here.
- ⑥ Wideband Input Interface: Signals entering through this port are not affected by the HPF Knob. The speaker output frequency range is 30Hz-300Hz.
- ⑦ Audio Input Port: XLR input interface, subject to HPF Knob control.

- ⑧ Audio Output Port: XLR output interface, allowing signal output to other subwoofers.
- ⑨ Power Switch: Turn on or off the subwoofer power.
- ⑩ Power Input Port: Connect to mains electricity to power the subwoofer.

## ■ Standard Configuration

- 1 × Speaker
- 1 × Power Cord
- 1 × User Manual

## ■ Applications

Suitable for home karaoke, small performances, and similar venues.

## ■ Technical Specifications

- Power: 280W
- Output Impedance: 4Ω
- Speaker Driver Size: 10 inches
- Frequency Response ( $\pm 3\text{dB}$ ): 30Hz-300Hz
- Power Supply: AC 100-240V 50/60Hz
- Enclosure Material: 18mm MDF
- Product Dimensions (W\*D\*H): 343\*343\*394mm
- Net Weight: 10.2kg

Note: The above data are measured by Takstar laboratory which has the final interpretation right!

## ■ Safety Instructions

To avoid electric shock, overheat, fire, radiation, explosion, mechanical risk and injury or property loss due to improper use, please read and observe the following items before use:

1. Please check if the power of the connected equipment matches with that of this product before operation. Adjust the volume to proper level during operation. Do not operate at over-power or high-volume level for extended time to avoid product malfunction.
2. If there is any abnormality during use (e.g., smoke, strange odor), please kill the power switch and unplug from power source, then send the product to the local after-sales service for repair.
3. Please use the provided power adapter to charge this product. If you need to use a different adapter, make sure to purchase one that is CCC certified and meets the required standards.
4. Keep this product and its accessories in a dry and ventilated area. Do not store in a humid or dusty area for extended time. Keep away from fire, rain, liquid intrusion, bumping, throwing, vibrating, or from blocking any ventilation openings, to prevent malfunction.
5. Please abide by safety rules during operation. Do not use the product in places prohibited by laws or regulations to avoid accident.
6. Do not disassemble or repair the product by yourself to avoid injury. If you have any questions or require any services, please contact our local after-sales service.