

前言

尊敬的用户：

感谢您选购得胜MS-189系列麦克风，为了您能够更好的了解使用本产品，建议您在使用前仔细阅读本说明书。

若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线 400 6828 333 或微信扫描二维码关注得胜官方公众号与我们联系。



产品特性

- 新版升级金属材质外壳，专业品质，经久耐用；
- 采用背极式驻极电容音头，灵敏度更高、噪音更低，音色圆润清脆；
- 手感强的按钮式开关设计，操作便捷，快速控制启闭；
- LED红色显示灯，头部红色光环，发言状态一目了然；
- 会议底座支持电池、幻象电源两种供电方式；
- 即插即用，无需安装驱动，转接线具有LED指示灯，可直观了解工作情况。

标准配置

MS-189USB

- MS-189USB x 1
- 防风棉 x 1
- XLR转USB连接线 x 1
- 说明书 x 1
- 1.5V AAA电池 x 2

MS-189U2

- MS-189U2 x 1
- 说明书 x 1
- XLR转USB连接线 x 1
- 1.5V AAA电池 x 2

适用场合

广泛应用于会议演讲、会议系统安装、公共传播等场合

技术参数

MS-189USB

- 单体：背极式驻极体
- 指向性：单指向
- 频率响应：100Hz-16kHz
- 灵敏度：-38dB±3dB (0dB=1V/Pa at 1kHz)
- 输出阻抗：340Ω±30% (at 1kHz)
- 负载阻抗：≥1000Ω
- 使用电压：9-52V幻象电源或1.5VAAA 电池2节

MS-189U2


- 单体：电容式
- 指向性：单指向
- 频率响应：19Hz-20KHz
- 灵敏度：-35dB±3dB(0dB=1V/Pa at 1KHz)
- 输出阻抗：340Ω±30%(at 1KHz)
- 负载阻抗：≥1000Ω
- 使用电压：9-52V幻象电源或1.5VAAA 电池2节

XLR转USB连接线

- 采样率 / 位深：48K 24bit
- 线长：3米

注：以上数据由得胜实验室测试得到，并拥有最终解释权！

频率响应曲线图

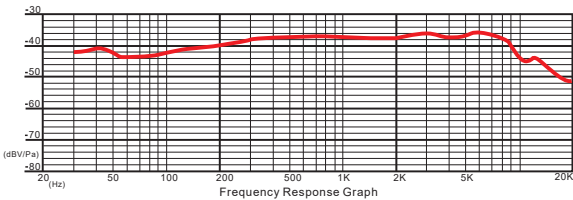

使用方法

1. 接好输出线，并连接至电脑端USB接口；
2. 开启麦克风电源开关，在电脑端慢慢调整麦克风音量，直至合适为止；
3. 建议讲话时，应与麦克风保持在5~30cm左右。

注意事项

1. XLR转USB连接线，禁止接入调音台48V幻象供电，高压会击穿线内解码芯片，造成损坏；
2. 使用过程中，用手罩住会议麦克风头部或使其接近扬声器，可能产生啸叫，遇此情形时，先降低扬声器音量，拉开与扬声器的距离，使麦克风和扬声器不正面相对；
3. 麦克风灵敏度高，必须注意不要从高处落下或给予强烈冲击；
4. 避免在温度、湿度过高的场所进行保管；
5. 麦克风拾音及红色指示灯为幻象电源或电池供电，若没有声音或红灯没有亮，请检查电源电池是否接触好。

安全警示

为避免电击、高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品前，请仔细阅读并遵守以下事项：

1. 使用产品时请确认所连设备与本产品是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常；
2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送售后服务网点检修；
3. 消费者若使用电源适配器供电，则应购买配套使用获得CCC认证并满足标准要求的电源适配器；
4. 本产品及配件都应放置在室内干燥通风处，请勿长期存放在潮湿、灰尘多的环境，使用中避免靠近火源、雨淋、进水、过度碰撞、抛掷、振动本机及覆盖通风孔，以免损坏其功能；
5. 若产品需要固定于墙壁或天花板上，请确保固定到位，防止因固定强度不足导致产品发生跌落危险；
6. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本产品，以免导致意外事故；
7. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地售后服务网点跟进处理。

环保说明

产品中有害物质或元素的名称及含量标识表										
部件名称	有害物质或元素									
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴联苯醚 (PBDE)	邻苯二甲酸二正丁酯 (DBP)	邻苯二甲酸二异丁酯 (DIBP)	邻苯二甲酸丁基酯 (BBP)	邻苯二甲酸二(2-乙基己基)酯 (DEHP)
塑料部件	○	○	○	○	○	○	○	○	○	○
金属部件	×	○	○	○	○	○	○	○	○	○
电路板组件	×	○	○	○	○	○	○	○	○	○
线缆	×	○	○	○	○	○	○	○	○	○
注1：○：表示该有害物质在该部件所有均质材料中的含量均不超过国家电子产品有害物质限制使用国家标准要求。 ×：表示该有害物质至少在该部件的某一均质材料中的含量超出国家电子产品有害物质限制使用国家标准要求。 注2：以上未列出的部件，表明其有害物质含量均不超过国家电子产品有害物质限制使用国家标准要求。										
此标志为产品的环保使用期限标志，且此环保使用期限只适用于产品正常工作温度和湿度等条件。										

产品服务保证书

姓名：_____ 电话：_____ 地址：_____

商品：_____ 型号：_____ 购买日期：_____ 年 _____ 月 _____ 日

维修记录栏（由维修员填写）

维修员签名

日期

1. 本单为保修凭证，请用户妥善保管，如有遗失，恕不保修或退换。

2. 保修期限：购买之日起十二个月内。

3. 除了不可抗力事件损坏外，由本公司负责，免费维修。

4. 如属保管不善或使用不当造成的损坏，维修点将酌情收费。

5. 擅自拆卸维修者，不予保修。

6. 以上保修条款仅限于中国市场适用（不包含港澳台地区）。

广东得胜电声有限公司

◆电话：400-6828-333

◆地址：中国广东省惠州市博罗县龙溪街道夏寮村村委会大门村夏寮（得胜创业园）

广东得胜电声有限公司制造

地址：中国广东省惠州市博罗县龙溪街道夏寮村村委会大门村夏寮（得胜创业园）

邮编：516121

全国服务热线：400 6828 333

传真：0752-6383950

邮箱：xs@takstar.com

扫一扫，了解更多产品

■ Preface

Dear Customer,
Thanks for purchasing our product. Read this manual thoroughly for proper use.
If you have any questions or suggestions, please contact our local sales service.

■ Features

- Upgraded metal housing for professional quality and exceptional durability.
- Back-electret condenser capsule delivers higher sensitivity, lower noise, and mellow, crisp sound.
- Tactile push-button switch for quick and easy on/off control.
- Red LED indicator and red halo on mic head clearly show speaking status at a glance.
- Conference base supports both battery and phantom power.
- Plug and play with no driver required; adapter cable features LED indicator for easy status monitoring.

■ Package Contents

MS-189USB

- | | |
|----------------------|-----------------|
| 1 × MS-189USB | 1 × Windscreen |
| 1 × XLR to USB Cable | 1 × User Manual |
| 2 × AAA Battery | |

MS-189U2

- | | |
|----------------------|-----------------|
| 1 × MS-189U2 | 1 × User Manual |
| 1 × XLR to USB Cable | 2 × AAA Battery |

■ Applications

Widely used in conference speeches, conference system installation, public address, and other scenarios.

■ Specifications

MS-189USB

- Transducer: Back-electret condenser
- Polar Pattern: Unidirectional
- Frequency Response: 100Hz–16kHz
- Sensitivity: $-38\text{dB} \pm 3\text{dB}$ ($0\text{dB}=1\text{V}/\text{Pa}$ at 1kHz)
- Output Impedance: $340\Omega \pm 30\%$ (at 1kHz)
- Load Impedance: $\geq 1000\Omega$
- Operating Voltage: 9–52V phantom power or 2 × 1.5V AAA batteries

MS-189U2


- Transducer: Condenser
- Polar Pattern: Unidirectional
- Frequency Response: 19Hz–20kHz
- Sensitivity: $-35\text{dB} \pm 3\text{dB}$ ($0\text{dB}=1\text{V}/\text{Pa}$ at 1kHz)
- Output Impedance: $340\Omega \pm 30\%$ (at 1kHz)
- Load Impedance: $\geq 1000\Omega$
- Operating Voltage: 9–52V phantom power or 2 × 1.5V AAA batteries

XLR to USB Cable

- Sampling Rate/Bit Depth: 48kHz/24bit
- Cable Length: 3m

Note: The above data are measured by Takstar laboratory which has the final interpretation right!

■ Frequency Response Graph

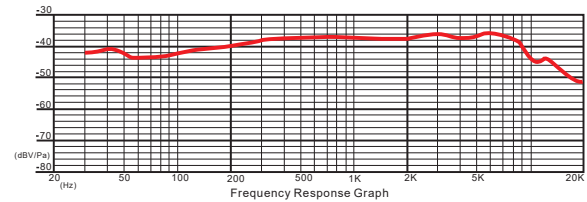

■ Usage Instructions

1. Connect the output cable to a USB port on your computer.
2. Turn on the microphone, then slowly adjust the mic volume on the computer to a suitable level.
3. Speak at a distance of 5–30cm from the microphone.

■ Cautions

1. Do not connect the XLR to USB cable to a mixer's 48V phantom power. High voltage will damage the built-in decoder chip.
2. Covering the microphone head or placing it near a speaker may cause feedback. If this happens, lower the speaker volume, increase the distance, and avoid pointing the microphone directly at the speaker.
3. The microphone is highly sensitive. Do not drop it or subject it to strong impact.
4. Avoid storing in high temperature or high humidity environments.
5. The microphone and red indicator light are powered by phantom power or batteries. If there is no sound or the red light does not turn on, check the power/battery connection.

■ Safety Instructions

To avoid electric shock, overheat, fire, radiation, explosion, mechanical risk and injury or property loss due to improper use, please read and observe the following items before use:

1. Please check if the power of the connected equipment matches with that of this product before operation. Adjust the volume to proper level during operation. Do not operate at over-power or high-volume level for extended time to avoid product malfunction.
2. If there is any abnormality during use (e.g., smoke, strange odor), please kill the power switch and unplug from power source, then send the product to the local after-sales service for repair.
3. Power adapter used, if any, should be approved by CCC certification or similar standards and comply with the power supply requirements.
4. Keep this product and its accessories in a dry and ventilated area. Do not store in a humid or dusty area for extended time. Keep away from fire, rain, liquid intrusion, bumping, throwing, vibrating, or from blocking any ventilation openings, to prevent malfunction.
5. The product must, when installed on walls or ceilings, be fixed firmly in place at adequate strength to prevent from falling.
6. Please abide by safety rules during operation. Do not use the product in places prohibited by laws or regulations to avoid accident.
7. Do not disassemble or repair the product unauthorized to avoid injury. If you have any questions or require any services, please contact our local after-sales service.