



采用背极式驻极电容音头；
灵敏度更高、噪音更低；
音色圆润、清脆；
手感强的按钮式开关；
LED红色显示灯；
头部红色光环；
电池、幻象电源两种供电方式；
专业品质，操作便捷、节能环保；
广泛应用于会议演讲、会议系统
安装、公共传播等场合。

技术参数:

单体：背极式驻极体

指向性：单指向

频率响应：100Hz-16KHz

灵敏度：-33dB±3dB (0dB=1V/Pa at 1KHz)


输出阻抗：340Ω±30% (at 1KHz)

负载阻抗：≥1000Ω

使用电压：9-52V幻象电源

或1.5V AAA 电池2节

频率响应曲线图:

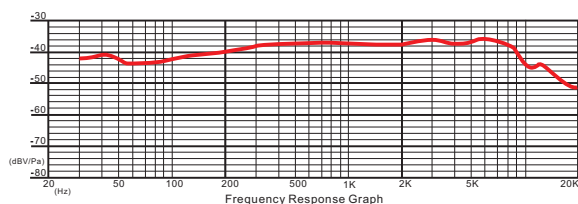

使用方法:

1. 卡好卡侬输出线，并连接至扩音器输入插孔。
2. 将扩音器旋钮先控制在零位置，然后开启扩音器电源开关和麦克风电源开关，再慢慢调整扩音器音量，直至合适为止。
3. 建议讲话时，应与麦克风保持在5~30CM左右。

注意事项:

1. 用手罩住会议麦克风头部或使其接近扬声器，可能产生啸叫，遇此情形时，先降低扩音器音量，拉开与扬声器的距离，使麦克风和扬声器不正面相对。
2. 麦克风灵敏度高，必须注意不要从高处落下或给予强烈冲击。
3. 避免在温度、湿度过高的场所进行保管。
4. 麦克风拾音及红色指示灯为幻象电源或电池供电，若没有声音或红灯没有亮，请检查电源或电池是否接触好。

配件:

Φ6X6M公母卡侬线一条

防风棉一个

※本产品相关规格及配置如有变更，恕不另行通知。
※如需和配件方面的信息，请就近和得胜代理商联系，
或请访问得胜网站www.takstar.com

国内销售部

电话：400 6828 333

地址：广东省惠州市博罗县龙溪镇富康一路2号

网址：www.takstar.com

传真：0752-6383950

邮编：516121




Features

- Back electret condenser capsule
- High sensitivity and low noise
- Clear and bright vocal pick-up
- On/off button with LED indicator on base and gooseneck
- Red light ring
- Optional use of phantom power or batteries
- Excellent quality, easy control and low power consumption

Specification

- Transducer Principle: Back electret condenser
- Directivity: Uni-directional
- Frequency Response: 100Hz-16KHz
- Sensitivity: -33dB±3dB (0dB=1V/Pa at 1KHz)
- Output Impedance: 340Ω ± 30% (at 1KHz)
- Load Impedance: ≥1000Ω
- Power Requirement: 9-52V DC Phantom Power or 2pcs of 1.5V AAA batteries

Frequency Response Graph

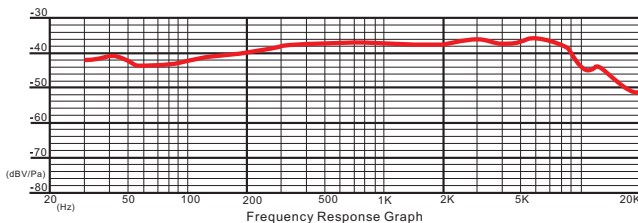

Usage

1. Connect the microphone and amplifier with an audio connecting cable.

2. Set the volume of the amplifier to minimum position, turn on the amplifier, and adjust the volume to the desired level.
3. The best distance between user and microphone is 5-30cm.

Notice

1. If the head of microphone is touched by hand or brought close to the speaker, a howling sound may be generated. To prevent this, please decrease the volume, and then place the microphone so that it is not pointed to the speaker and there is a sufficient distance between the microphone and speaker.
2. Due to the high sensitivity of the capsule, do not drop it from high or apply strong shock to it.
3. To maintain the sensitivity and quality of sound reproduction, avoid exposing it to moisture and extreme temperatures.
4. If there is no sound or the red LED doesn't work, please check if the power is well connected.

Accessories

- ∅6x6m balanced and shielded audio output cable 1pc
- Windscreen 1pc

Application

Public address, conference

- * Related specifications and configuration are subject to change without notice.
- * If you need the information of service or accessories, please contact the local dealer.