

## 尊敬的用户：

感谢您选购TAKSTAR E188M便携式数字扩音器，为了您能够更好的了解使用本产品，建议您在使用前仔细阅读本说明书。


若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线400 6828 333或使用微信扫描二维码关注得胜官方公众号与我们联系。



## 产品特性

- 集麦克风、播放器为一体的便携式多媒体扩音器
- 选用稀土材质扬声器，重量轻、音质好、声音大
- 具有无线音乐播放功能，支持U盘、TF储存卡的多媒体音频文件播放
- 内置大容量耐久型锂离子电池，为该产品提供高电能的同时，减少废弃物的产生
- 采用Class D 数字功放模块，低功耗高效率，能输出高达8W的音乐功率
- 内置大容量耐久型锂离子电池，充电约4小时，使用时间可达10小时以上
- 产品符合人体工学原理设计，造型新颖，外观时尚，使用舒适

## 控制面板功能示意图

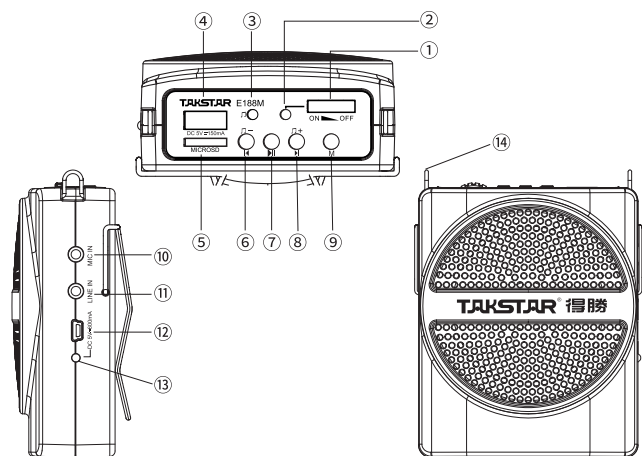

- ① 电源开关和音量调整旋钮：向左转动旋钮，听到“嘀”一声，表示扩音器已通电，此时电源指示灯②亮，继续向左转动旋钮声音增大，反之，声音减小直至关机
- ② 电源指示灯：当扩音器通电时，此灯会亮。绿灯表示高电压，红灯表示低电压，当此灯亮红灯时，请及时为电池充电
- ③ 音乐播放指示灯：音乐播放时，此灯闪烁
- ④ U盘插孔：将存放有音乐文件的U盘插入此孔
- ⑤ TF卡插口：根据标示方向插入存有音乐文件的TF卡，插入时，听到“嗒”一声，表示已安装到位并将其锁住；取卡时只要将卡往下按，听到“嗒”一声，TF卡会自动弹出来
- ⑥ 上一曲按键 **K**：短按此键为上一曲，长按此键可以减小音乐音量
- ⑦ 播放/暂停按键 **II**：按此键可以控制音乐的播放与暂停
- ⑧ 下一曲按键 **M**：短按此键为下一曲，长按此键可以增大音乐音量
- ⑨ 功能切换键 **M**：U盘/TF卡、蓝牙、外接音频输入模式切换
- ⑩ MIC IN 输入插孔：将ø3.5mm的麦克风插头插入此孔，进入扩音工作状态；操作时，请不要将麦克风的拾音面朝向扩音器的扬声器，以免产生啸叫
- ⑪ LINE IN 输入插孔：用ø3.5mm插头的音频线将DVD、MP3等音乐信号导入本机可做有源音箱使用
- ⑫ 充电输入插孔：将USB充电线插入此孔，另一端连接通用的USB输出充电器（如手机充电器、电脑USB接口等），即可对电池进行充电
- ⑬ 充电指示灯：将USB充电线插入⑫孔内时，指示灯亮，表示电池进入充电状态；指示灯由红色变为绿色后，表示电已充满
- ⑭ 肩挂扣

## 技术参数

- 频率响应：150Hz-12KHz
- 峰值功率：8W THD+N<10%
- 扬声器阻抗：4Ω
- 工作电压：DC 3.5V~4.2V
- 驻极体头戴话筒规格：-49至-52dB
- 电池规格：18650单节3.7V~2000mAh
- 充电器规格：DC 5V~600mA
- 充电时间：约4小时
- 使用时间：≥10小时
- TF卡：支持64G以下
- 媒体格式：MP3、WAV、WMA
- 蓝牙版本：5.0
- 使用距离：约10米
- 单机重量：220g
- 产品规格：99x81x38mm

## 使用与注意事项

为避免电击、过高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品，请仔细阅读并遵守以下事项：

1. 使用产品时请确认所连接设备与本产品功率是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常和耳朵听力损伤；
2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送经销商检修；
3. 本产品及配件都应放置在室内干燥通风处，勿长期存放在潮湿、灰尘多的环境，使用中避免靠近裸露火源、碰到液体物质、雨淋、产品进水、过度碰撞、抛掷、振动本机及覆盖通风孔，以免损坏其功能；
4. 若产品需要固定于墙壁或天花板上时，请确保固定到位，防止因固定强度不足导致产品发生跌落危险；
5. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本机，以免导致意外事故；
6. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地经销商跟进处理；
7. 本产品适用的海拔及气候条件由选用的充电适配器决定。

## 标准配置

便携式扩音器	头戴麦克风	腰挂扣
USB充电线	绑带	说明书

## 适用场合

- 教学、导游、培训、促销、宣传、晨练、娱乐等场合扩音用




### Dear Customer,

Thank you for purchasing TAKSTAR E188M portable digital amplifier. Please read the user manual carefully before operation and keep it for reference in future. If you have any question or suggestion, please contact our local dealer.

### Features.....

- The portable multimedia amplifier combining microphone, player together
- Rear earth material speaker, light weight, wonderful sound, high volume
- Wireless music playing function plays the multimedia audio files in USB stick or TF card
- High capacity Li-ion battery provides sufficient power supply
- Class D power amplifier module, low power consumption, high efficiency, output music power up to 8W
- 4 hours of recharging lasts for more than 10 hours of operation
- Ergonomic design, innovative and fashionable contour, comfortable operation

### Function Illustration.....

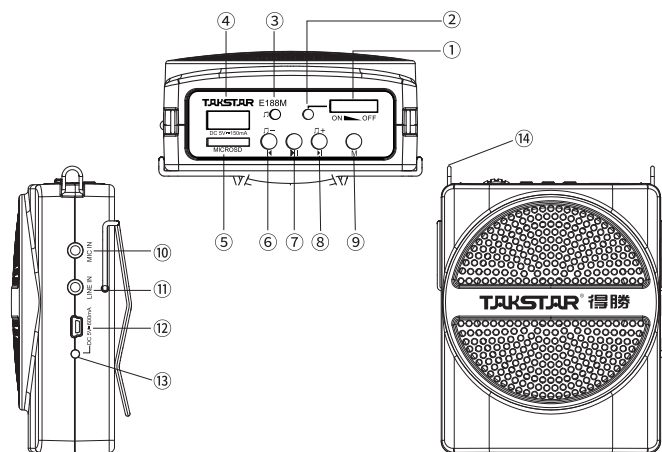

- ① Power switch and volume knob: turn the knob to left. When you hear the sound "Dee", the amplifier is powered on and power LED ② lights up. Continue to turn the knob left to increase the volume. Turn the knob right to decrease the volume till turn off the amplifier.
- ② Power LED: when the amplifier is powered on, this LED lights up. Lighting up green means high power voltage, and red means low. Please recharge in time.
- ③ Music playing LED: during music playing, this LED flashes.
- ④ USB interface: insert USB stick of music files into this interface.
- ⑤ TF card port: insert the TF card according to the direction of the illustration. When you hear the sound "Da" after you insert it, it means the card is fixed. When you want to take out the card, just press it and the card will come out automatically with a sound "Da".
- ⑥ Previous song button **⏮**: shortly press it for previous song. Keep pressing it for decreasing music volume.
- ⑦ Play/pause button **⏮**: press this button to play/pause the music playing.
- ⑧ Next song button **⏭**: shortly press it for next song. Keep pressing it for increasing music volume.
- ⑨ Function switching button **M**: it is used to switch the audio input modes of USB stick/TF card, Bluetooth, external audio.
- ⑩ MIC IN input port: insert ø3.5mm microphone into this port for sound reinforcement. Keep the microphone cartridge against the speaker to avoid feedback.
- ⑪ LINE IN input port: use the audio cable of ø3.5mm plug to input music signal of DVD or MP3 to the amplifier. The amplifier is now used as active speaker.

- ⑫ Charging input port: connect one end of USB charging cable with this port, and the other end with USB charger (cell phone charger, PC USB interface, etc) to charge the battery.
- ⑬ Charging LED: plug USB charging cable into the port ⑫ and the charging LED lights up. This means the battery is being charged. When the LED turns red to green, this means the battery is charged fully.
- ⑭ Shoulder strap buckle.

### Specification.....

- Frequency Response: 150Hz-12KHz
- Peak Power: 8W THD+N<10%
- Speaker Impedance: 4Ω
- Operation Voltage: DC 3.5~4.2V
- Headphone Electret Microphone: -49 to -52dB
- Battery Specification: 18650 one battery 3.7V~2000mAh
- Charger Specification: DC 5V~600mA
- Charging Time: approximate 4h
- Operation Time: ≥10h
- TF Card: max 64G
- Media Format: MP3, WAV, WMA
- Bluetooth Version: 5.0
- Operation Range: approximate 10m
- Net Weight: 220g
- Dimension: 99x81x38mm

### Operation & Caution.....

To avoid electric shock, over temperature, catching fire, explosion, mechanical risk and hurt or property loss caused by improper use, please read the following items carefully before operation:

1. Adjust the volume to proper level during operation. Do not operate at high volume level to avoid hearing loss.
2. If abnormal phenomenon (smoke, abnormal smell) happens, please turn off the power switch and disconnect the power plug with power socket, and send the product to local dealer for maintenance.
3. The product and accessories should be put in dry and ventilated place rather than humid or dusty environment. Prevent the product from fire, liquid, rain, water, over-colliding, throwing, vibrating, vent hole covered to avoid function destroyed.
4. When the product needs to be installed on wall or ceiling, please fix it tightly to avoid dropping risk.
5. Please abide by safety rules during operation. Do not use the product in the place prohibited by regulation or law to avoid accident.
6. Do not disassemble or repair the product by yourself to avoid hurt. If you have question or need service, please contact the local dealer.
7. The applicable altitude and climate condition of this product is subject to charging adapter.

### Product Content.....

Portable amplifier	Headphone	Belt clip
USB charging cable	Strap	User manual

### Application.....

- Teaching, tour guide, training, promotion, propaganda, morning exercise, entertainment