

尊敬的用户：

感谢您选购得胜PC-K100专业动圈麦克风，为了您能够更好地了解使用本产品，建议您在使用前仔细阅读本说明书。

若存在有疑问或者您有宝贵的建议，可通过拨打得胜官方服务热线 400 6828 333 或使用微信扫描二维码关注得胜官方公众号与我们联系。



产品特性

- 专业动圈麦克风，为舞台演出、户外弹唱、娱乐直播和家庭KTV等场景打造；
- 专为人声优化的频响曲线，中频饱满，高频清晰，声音更具层次感；
- 超心形拾音模式，有效抑制噪音和回声，声音清晰、准确；
- 锌合金材质本体，铜焊热处理网头，手感舒适，坚固耐用；
- 配备5米无氧铜芯麦克风线，抗干扰性强，音质纯净稳定。

标准配置

- 麦克风.....1支
- 麦克风线.....1条
- 说明书.....1份

适用场合


- 舞台演出、户外弹唱、家庭KTV、娱乐直播等场合

技术参数

音头：动圈式
指向性：超心型指向
频率响应：50Hz-16KHz
灵敏度：-50dB±3dB (0dB=1V/ Pa at 1KHz)
输出阻抗：430Ω±30% (at 1KHz)
单体重量：约235g
尺寸：Ø50 x 170mm

注：以上数据由得胜实验室测试得到，并拥有最终解释权！

频率响应曲线图

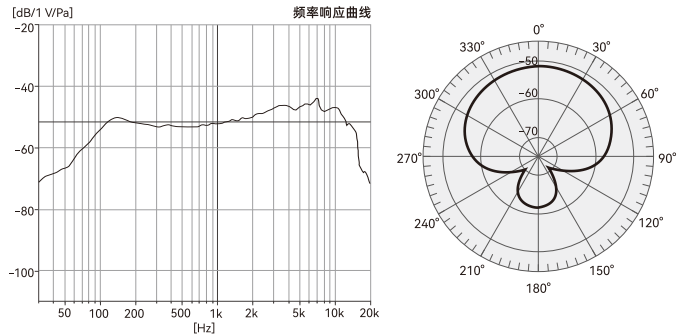


功能示意

- ① 电源开关：拨至“ON”方向开启麦克风电源，拨至“OFF”方向关闭麦克风电源。
- ② XLR接口：通过XLR音频线与声卡、调音台等音频设备连接。

使用说明

- 1. 麦克风与线材连接时，将线材卡侬头一端对准麦克尾部三针插入，直到卡侬上的扣键“哒”的一声定位。
- 2. 使用时，应对准麦克风网头顶部方向讲话，人与麦克风建议保持5-10厘米的拾音距离。

- 3. 麦克风与连接线分开时，可握住线材插头，同时按压扣键，然后将插头从麦克风底部接口拔出。
- 4. 将麦克风线材另一端与调音台、功放、声卡等设备连接。

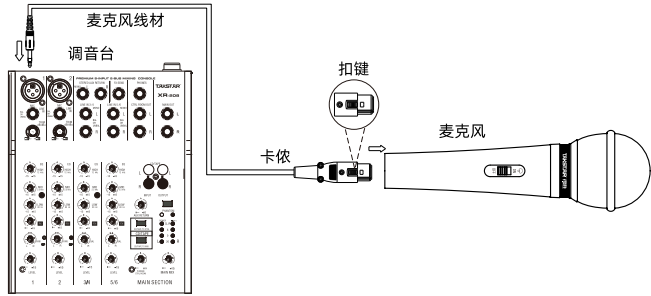

- 5. 使用时应先将设备音量调小，再将音量从小到慢慢调节至合适，以免声压过大对扬声器产生冲击。
- 6. 手不要握在麦克风网头上，尽可能的拉开麦克风与扬声器的距离，避免麦克风和扬声器相对，以免影响麦克风音质及有效控制回馈啸叫。



安全警示

为避免电击、过高温、着火、辐射、爆炸、机械危险以及使用不当等可能造成的人身伤害或财产损失，使用本产品，请仔细阅读并遵守以下事项：

- 1. 使用产品时请确认所连接设备与本产品功率是否匹配以及合理调整音量大小，不要在超过产品功率及大音量下长时间使用，以免造成产品异常和耳朵听力损伤；
- 2. 使用中若发现有异常（如冒烟、异味等），请立即关闭电源开关并拔掉电源插头，然后将产品送经销商检修；
- 3. 本产品及配件都应放置在室内干燥通风处，勿长期存放在潮湿、灰尘多的环境，使用中避免靠近裸露火源、碰到液体物质、雨淋、产品进水、过度碰撞、抛掷、振动物体及覆盖通风孔，以免损坏其功能；
- 4. 若产品需要固定于墙壁或天花板上时，请确保固定到位，防止因固定强度不足导致产品发生跌落危险；
- 5. 使用该产品时需遵守相关安全规定，法律法规明确禁止使用场合请勿使用本产品，以免导致意外事故；
- 6. 请不要自行拆机改装或维修，以防止出现人身伤害，如有问题或服务需求请联系当地售后服务网点跟进处理。

产品中有毒有害物质或元素的名称及含量标识表

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
塑料部件	○	○	○	○	○	○
金属部件	×	○	○	○	○	○
电路板组件	×	○	○	○	○	○
线缆	×	○	○	○	○	○
本表格依据SJ/T 11364的规定编制。 ○：表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572规定的限量要求以下。 ×：表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572规定的限量要求。 此标志为产品的环保使用期限标志，且此环保使用期限只适用于产品正常工作的温度和湿度等条件。						

※本产品相关规格如有变更恕不另行通知。
※如需服务和配件方面的信息，请就近联系当地售后服务网点，或请访问得胜网：www.takstar.com



Dear User,
Thank you for purchasing Takstar PC-K100 Professional Dynamic Microphone.
To better understand and use the product, please read this manual thoroughly.
If you have any questions or suggestions, please contact our local sales outlet.

■ Features

- Pro dynamic mic for stage performances, outdoor singing, live streaming, and karaoke.
- Vocal-optimized frequency response with full mids and clear highs for layered sound.
- Supercardioid pickup pattern effectively suppresses noise and echo for clarity.
- Durable zinc alloy body with copper-welded, heat-treated mesh head for comfort and longevity.
- 5m OFC mic cable ensures strong anti-interference and stable, pure sound quality.

■ Standard Configuration

- 1 × Microphone
- 1 × Mic Cable
- 1 × User Manual

■ Application



- Stage performances, outdoor singing, home karaoke, and entertainment live streaming.

■ Specifications

- Transducer Type: Dynamic
- Polar Pattern: Supercardioid
- Frequency Response: 50Hz ~ 16KHz
- Sensitivity: -50dB ± 3dB (0dB=1V/Pa, 1KHz)
- Output Impedance: 430Ω±30% (at 1KHz)
- Weight: Approx. 235g
- Dimensions: Ø50 x 170mm

Note: The above data are measured by Takstar laboratory which has the final interpretation right!

■ Frequency Response Curve

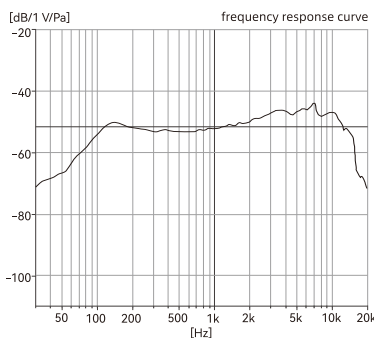

■ Function Descriptions


- ① Power Switch: Switch to ON or OFF position to power on/off the mic respectively.
- ② XLR Interface: Connect the mic to audio device such as audio interfaces and mixers using an XLR audio cable.

■ Operation Instruction


1. When connecting the mic to the XLR cable, align the female connector of the cable with the three-pin interface at the tail of the mic. Insert it until you hear a click to lock it in place.
2. When using the mic, speak towards the top of the mic grille. It is recommended to maintain a pickup distance of 5-10 centimeters between your mouth and the mic.
3. When disconnecting the mic from the cable, hold the plug of the cable and

press the release button. Then, gently pull the plug out from the bottom interface of the mic.

4. Align the cable connector's pins with the three-pin socket at the rear of the mic. Insert until it clicks into place.

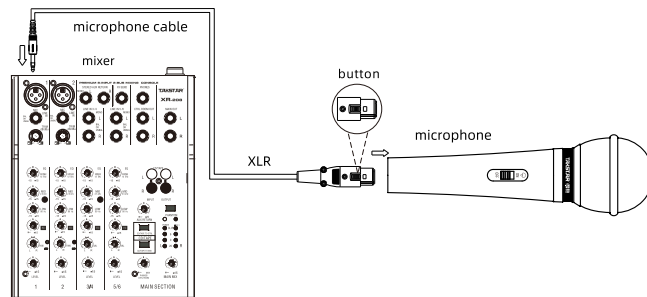

5. Start with low device volume and gradually increase it to avoid excessive sound pressure on the speakers.
6. Avoid gripping the mic grille and maintain a distance between the mic and speakers to prevent interference, ensuring optimal sound quality and feedback control.

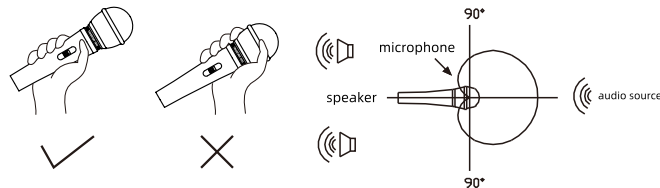

■ Cautions

To avoid electric shock, overheat, fire, radiation, explosion, mechanical risk and injury or property loss due to improper use, please read and observe the following items before use:

1. Please check if the power of the connected equipment matches with that of this product before operation. Adjust the volume to proper level during operation. Do not operate at over-power or high-volume level for extended time to avoid product malfunction.
2. If there is any abnormality during use (e.g., smoke, strange odor), please kill the power switch and unplug from power source, then send the product to the local after-sales service for repair.
3. Keep this product and its accessories in a dry and ventilated area. Do not store in a humid or dusty area for extended time. Keep away from fire, rain, liquid intrusion, bumping, throwing, vibrating, or from blocking any ventilation openings, to prevent malfunction.
4. The product must, when installed on walls or ceilings, be fixed firmly in place at adequate strength to prevent from falling.
5. Please abide by safety rules during operation. Do not use the product in places prohibited by laws or regulations to avoid accident.
6. Do not disassemble or repair the product by yourself to avoid injury. If you have any questions or require any services, please contact our local after-sales service.

产品服务保证书		
姓名: _____ 电话: _____ 地址: _____		
商品: _____ 型号: _____ 购买日期: _____ 年 _____ 月 _____ 日		
维修记录栏(由维修员填写)	维修员签名	日期

◆广东得胜电子有限公司 ◆电话: 400-6828-333 ◆地址: 广东省惠州市博罗县龙溪街道富康一路2号

※ The product specification is subject to change without prior notice.
※ If you need service or accessory information, please contact local dealer or visit our website: www.takstar.com